ContiMine
Continental ScoopMaster

› Engineered for Scoops operating in the harshest applications like Underground Hard Rock Mines

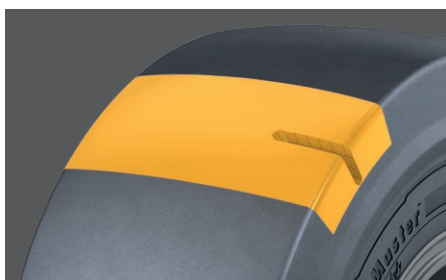› Extra deep smooth tread design for maximum casing protection against punctures and impacts

Characteristics

Continental's ScoopMaster was developed to last in this extremely harsh underground mining environment. Premium quality tread and sidewall rubber compounds provide maximum resistance to rock cutting, penetrations, and tearing. The special V.ply construction in combination with the carcass rubber compound provides high carcass strength, excellent flex fatigue, and sidewall damage resistance.

Applications

Loaders or Scoops transport heavy loads of orebodies at low speeds over a relatively short distance to dump trucks or conveyor belts. They often face freshly blasted, sharp rocks in wet and abrasive conditions. Durability, traction, and even wear are the most important tyre features.

Smooth extra deep tread design

Maximum casing protection against punctures and impacts

Wide contact area for reduced slippage, good traction, and even wear
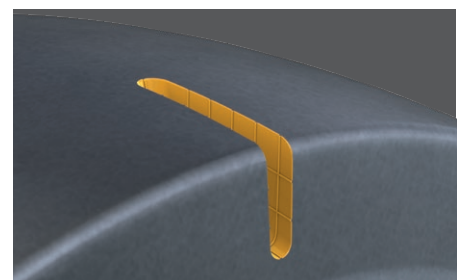
High wear volume for optimum mileage performance

Sidewall protection rib

Additional cut-resistant rubber rib to protect casing in sidewall area where sharp rocks can damage the tyre

Cut-resistant rubber compound for sidewall protection

Tread wear indicator (TWI)

Designed for easy and fast tread depth measurement

TWI shape prevents stone catching and carcass penetration

ScoopMaster

Article no.	Tyre size	TRA code	Type	Transport		Loader		Rim	Overall diam. mm (inch)	Overall width mm (inch)	Tread depth mm (32")
				SR / PR	LI/SS	SR / PR	LI/SS				
1270567	18.00-25	L5S	TL	-	-	28	199A2	13.00/2.5	1666 (65.6)	507 (20.0)	88 (111/32)

SR: Star Rating for Radial Tires

PR: Ply Rating for x-ply tires

LI: Load Index

SS: Speed Symbol

Specifications are subject to change without notice

For further technical information, see data sheets

For details regarding product availability, please contact your local sales representative.